


UFB142A, FLEXIBLE CABLE,
2.92MM(MALE)- 2.92MM(MALE)

UFB142A-292M292M-XXXA3

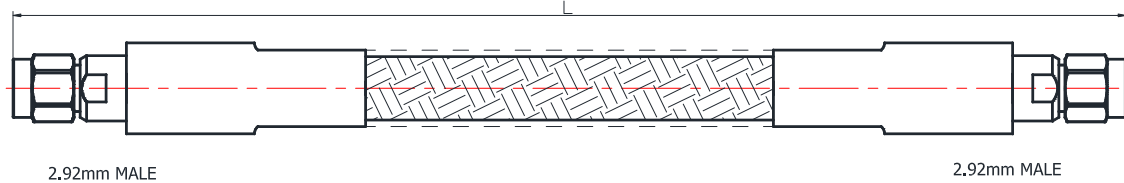

* Label and Shrinking tube design depend on customer's request.

Configuration

Connector 1 Type	2.92mm Male
Connector 1 Body Style	Straight
Body Material and Plating	Passivated Staindless Steel
Connector 1 Mount Method	None
Connector 2 Type	2.92mm Male
Connector 2 Body Style	Straight
Body Material and Plating	Passivated Staindless Steel
Connector 2 Mount Method	None
Cable Type	UFB142A

Electrical Specifications

Impedance	50 Ω
Frequency	DC to 40 GHz
Return Loss/VSWR	1.44 to 40 GHz
Phase Stability vs. Flexure	2° @ 10GHz ,3° @ 18GHz
Amplitude Stability	N/A
Shielding Effectiveness	<-100dB @ 1GHz
Phase Matching	On request
Signal Delay	On request
Power Handling	70watt @ 40GHz at sea level,VSWR1.0

Environmental Data

Temperature Range	-40°C to +80°C
2002/95/EC(RoHS)	Compliant

UFB142A, FLEXIBLE CABLE,
2.92MM(MALE)- 2.92MM(MALE)

UFB142A-292M292M-XXXA3

Cable Specifications

Center Conductor	Silver plated copper
Dielectric	Low Density PTFE
Jacket	FEP
Capacitance(pF/m)	80.38
Velocity of propagation(%)	83
Min. bending radius(mm)	9.65
Jacket Diameter(mm)	3.61±0.13

Armor Specifications

Armor Type	Stain steel wire covered by Tin plated copper wire and nomex braid
Min. bending radius(mm)	25.4
Diameter(mm)	7.5

Part Number List

Part Number	Length [mm]	Insertion Loss ≤(dB)			
		10GHz	18GHz	26.5GHz	40GHz
UFB142A-292M292M-10000A3	10000±50	11.04	14.98	18.4	22.8
UFB142A-292M292M-8000A3	8000±30	8.89	12.06	14.76	18.4
UFB142A-292M292M-3000A3	3000±30	3.51	4.76	5.83	7.3
UFB142A-292M292M-2000A3	2000±20	2.45	3.40	4.04	5.1
UFB142A-292M292M-1500A3	1500±15	1.89	2.57	3.15	3.9
UFB142A-292M292M-1200A3	1200±12	1.58	2.14	2.61	3.3
UFB142A-292M292M-1000A3	1000±10	1.36	1.85	2.25	2.8
UFB142A-292M292M-600A3	600±10	0.93	1.26	1.55	1.91
UFB142A-292M292M-550A3	550±10	0.89	1.19	1.46	1.81
UFB142A-292M292M-500A3	500±10	0.85	1.12	1.36	1.70
UFB142A-292M292M-250A3	250±10	0.553	0.747	0.91	1.125
UFB142A-292M292M-200A3	200±10	0.51	0.68	0.83	1.02

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.